



FEATURES

- ¼ turn washerless ceramic disc valve cartridges
- Flexible hose connection for 8" to 16" spread installations
- Flow rate 1.2 gpm (4.5 lpm) maximum flow rate
- Solid brass construction
- Listed by IAPMO, CSA, NSF, and other municipalities
- Warranty:
 - Limited lifetime warranty (residential use)
 - One year (commercial use)
- Shipping weight (lbs.) 10
- Shipping dimensions (in.): 29x12x4

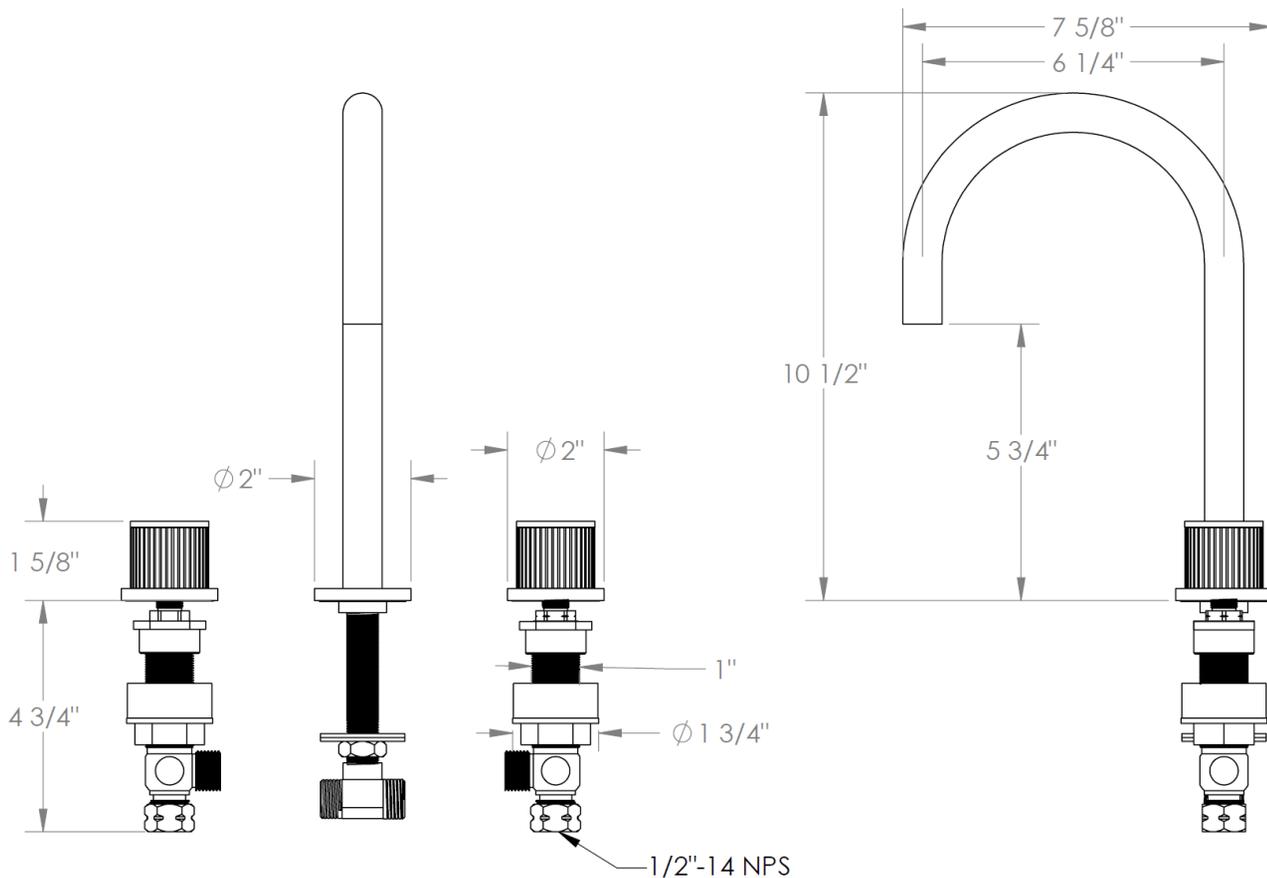


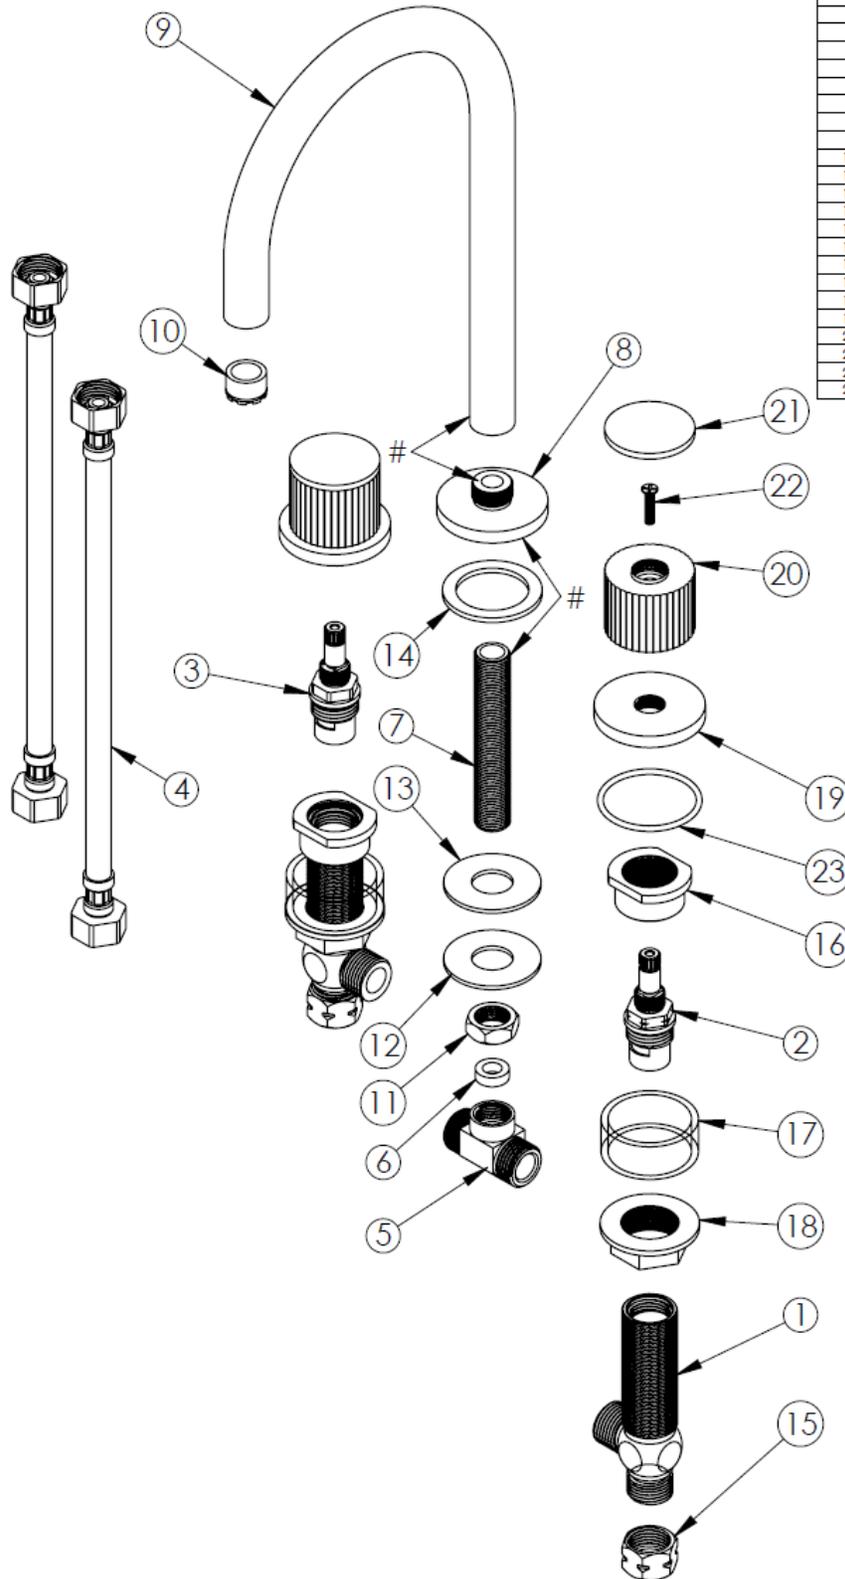


ITEM NO.	PART NUMBER	WETTED	QTY.
1	SS-502-VALVE-BODY	Y	2
2	CRT-502 (COLD)	Y	1
3	CRT-502 (HOT)	Y	1
4	502-FLEX-HOSE	Y	2
5	142-TEE	Y	1
6	142-TEE-GSKT	Y	1
7	142-NPPL	Y	1
8	23-2-SPT-BASE	Y	1
9	22-2-UK-SPT	Y	1
10	NEOPERL CACHE SSR TJ 1.2GPM (43.6260.010)	Y	1
11	142-LOCK-NUT	N	1
12	144-STL-WSHR	N	1
13	144-RB8R-WSHR	N	1
14	AS-GSKT (D1R018N)	N	1
15	502-COMP-NUT	N	2
16	CL16-TOP-LOCK-NUT	N	2
17	1.75X.125X.72-PLSTC-CLLR	N	2
18	502-PLSTC-LOCK-NUT	N	2
19	BK-ESC-R2		2
20	TA6-KNOB		2
21	TIB-KNOB-CAP		2
22	CR-FHMS 0.164-32x0.75x0.75-S		2
23	AS568 - 131		2

HANDLE TRIMS


TA4

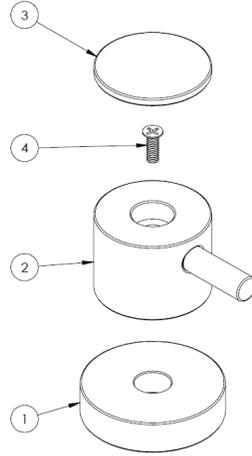


ITEM NO.	PART NO.	QTY.
1	BK-ESC-R2	1
2	TA4-KNOB	1
3	TIB-KNOB-CAP	1
4	#8-32 x 3/4" PH Screw	1

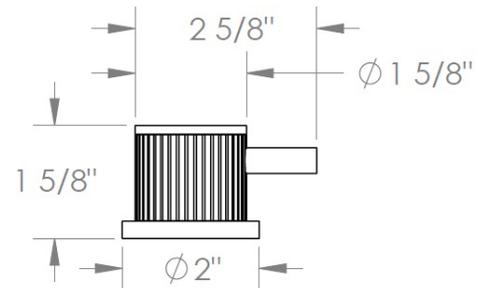

TA6

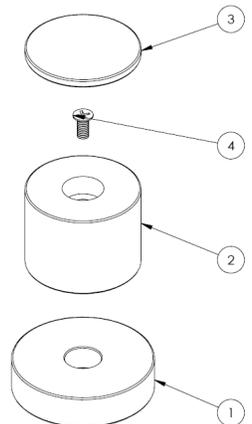

ITEM NO.	PART NO.	QTY.
1	BK-ESC-R2	1
2	TA6-KNOB	1
3	TIB-KNOB-CAP	1
4	#8-32 x 3/4" PH Screw	1

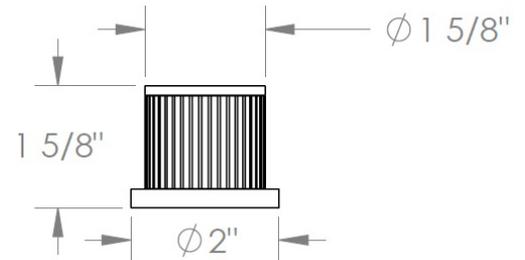

IMPORTANT INSTALLATION INFORMATION

- USE TEFLON TAPE OR PIPE SEALANT FOR THREADED CONNECTIONS
- DO NOT USE PLUMBER'S PUTTY ON ANY OF THE BRASS COMPONENTS
This will cause the finish to tarnish and void the warranty. A non-corrosive Alkoxy Silicone is recommended.
- DURING SWEATING OF LINES DO NOT OVERHEAT CASTING
Overheating may cause damage to internal mechanism
- COPPER ADAPTORS MAY BE REQUIRED TO COMPLETE YOUR INSTALLATION

For technical support, please call 718-257-2800