

WATERMARK

BROOKLYN, NEW YORK


Dualis 20-8.1-GS4

Deck Mounted Five Hole Bath Set



- Tub Spout Flow Rate: Full Flow
- Hand Shower Flow Rate: 1.75 GPM Max @ 45-80 PSI
- Solid brass construction with Fluehs half-turn ceramic disc valves
- Includes 3/4" hot and cold valves, diverter valve, and quick-connect nipple for tub spout
- Recommended Hole Size: 1 3/8"
- Maximum Deck Thickness: 1 3/4"
- Lever handles
- Option of brass, Bianco Carrara, Calacatta Gold, or Marrone marble inserts
- Professional installation recommended
- Some building codes require upstream installation of tempering valve conforming to ASSE 1070
- Access must be provided for future servicing

Available in all finishes shown on the [Watermark Designs website](https://www.watermark-designs.com)

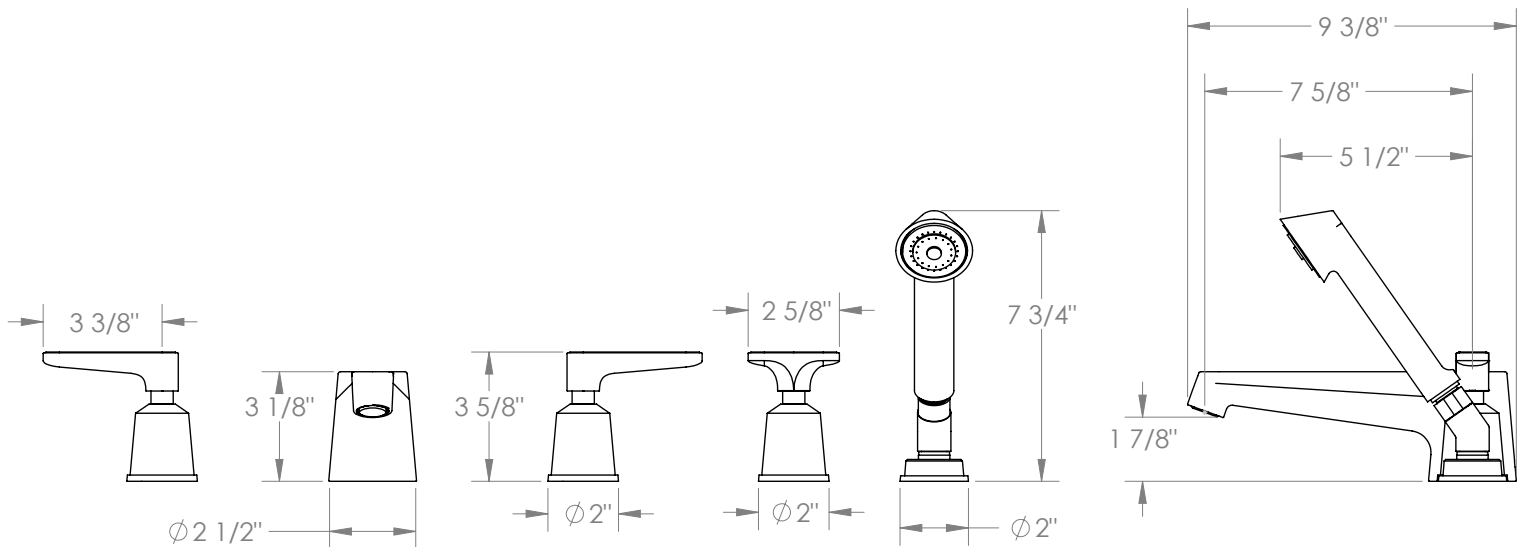

Meets the applicable requirements of ASME A112.18.1/CSA B125.1, entitled "Plumbing Supply Fittings".

Watermark Designs reserves the right to make revisions without notice to product specifications. All product dimensions are nominal.

Updated: 05/2026