


WATERMARK

BROOKLYN, NEW YORK

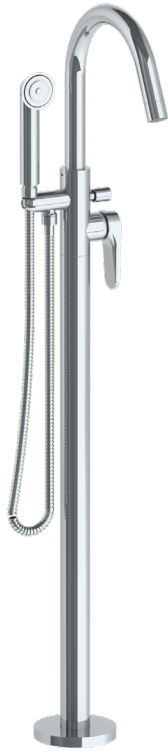


Available in all finishes shown on the [Watermark Designs website](https://www.watermark-designs.com)

Dualis

20-8.8G-GS2

Floor Mounted Exposed Bath Set with Gooseneck Spout and Hand Shower

- Tub Spout Flow Rate: Full Flow
- Hand Shower Flow Rate: 1.75 GPM Max @ 45-80 PSI
- Requires: SS-248.8FLR-RGH Floor Rough-In
- Solid brass construction with Kerox ceramic disc mixer cartridge
- Option of brass, Bianco Carrara, Calacatta Gold, or Marrone marble insert
- Professional installation recommended
- Some building codes require upstream installation of tempering valve conforming to ASSE 1070

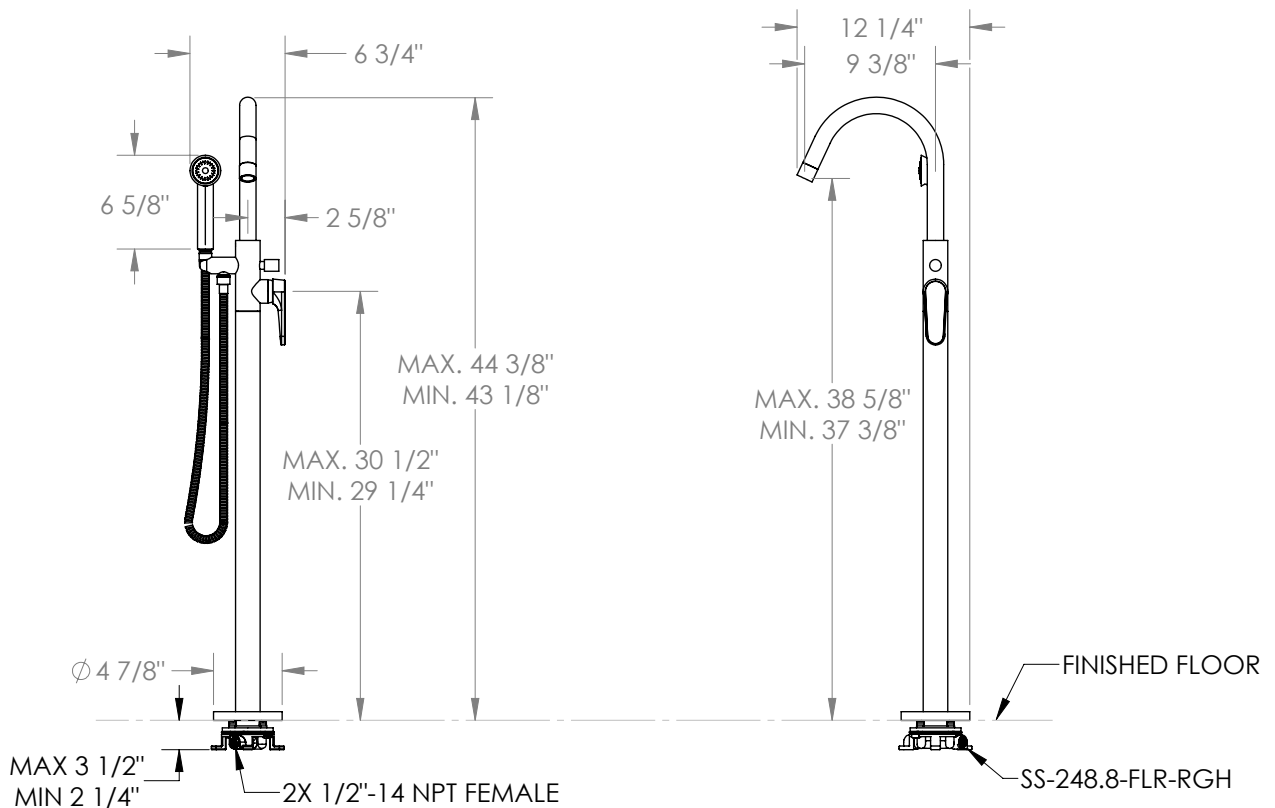

Meets the applicable requirements of ASME A112.18.1/CSA B125.1, entitled "Plumbing Supply Fittings".

Watermark Designs reserves the right to make revisions without notice to product specifications. All product dimensions are nominal.

Updated: 05/2026