WATERMYRK

BROOKLYN, NEW YORK



Deck Mounted Single Hole Pullout Prep Faucet



Flow Rate: 1.75 GPM Max @ 45-80 PSI

• Recommended Hole Size: 1 3/8"

Maximum Deck Thickness: 1 1/2"

Lead-free brass construction with Kerox mixer cartridge

Includes flex hoses for connecting to hot & cold supplies


 360° swivel spout with magnetic docking for sprayhead


Button toggles between aerated and spray modes

Spray hose with ball-joint provides smooth operation and 16" of reach

· Professional installation recommended

Available in all finishes shown on the Watermark Designs website



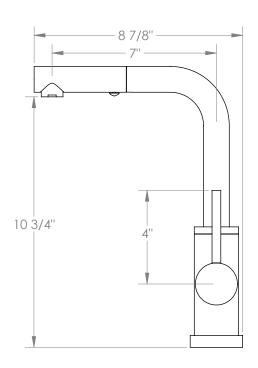

Meets the applicable requirements of ASME A112.18.1/CSA B125.1, entitled "Plumbing Supply Fittings".

Watermark Designs reserves the right to make revisions without notice to product specifications. All product dimensions are nominal.