

WATERMYRK

BROOKLYN, NEW YORK





• Recommended Mounting Hole: 1-3/8"

· All Lead-Free Brass Construction

Flow Rate: 1.75 GPM Max @ 45-80 PSI


· Kerox Ceramic Mixing Cartridge

360° Rotating Spout

Professional Installation Required



Available in all finishes shown on the Watermark Designs website

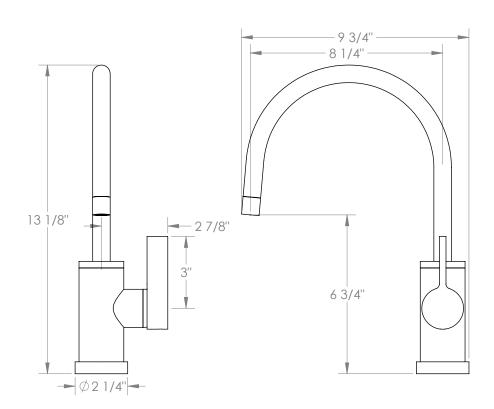

Meets the applicable requirements of ASME A112.18.1-2005/CSA B125.1-05, entitled "Plumbing Supply Fittings".

Watermark Designs reserves the right to make revisions without notice to produce specifications. All product dimensions are nominal. **Updated:** 11/2025