

# WATERMARK

BROOKLYN, NEW YORK


## Thea 45-4.4-TA6

Wall Mounted Bidet Spray Set



- Flow Rate: 1.5 GPM @ 45-80 PSI
- Requires: SS-SHV1.2 Wall Rough-In
- Solid brass construction
- Valve must be off when spray is not in use
- Includes 49" hose & check valve in the wall elbow outlet
- Professional installation recommended
- Some building codes require upstream installation of tempering valve conforming to ASSE 1070.

Available in all finishes shown on the [Watermark Designs website](#)

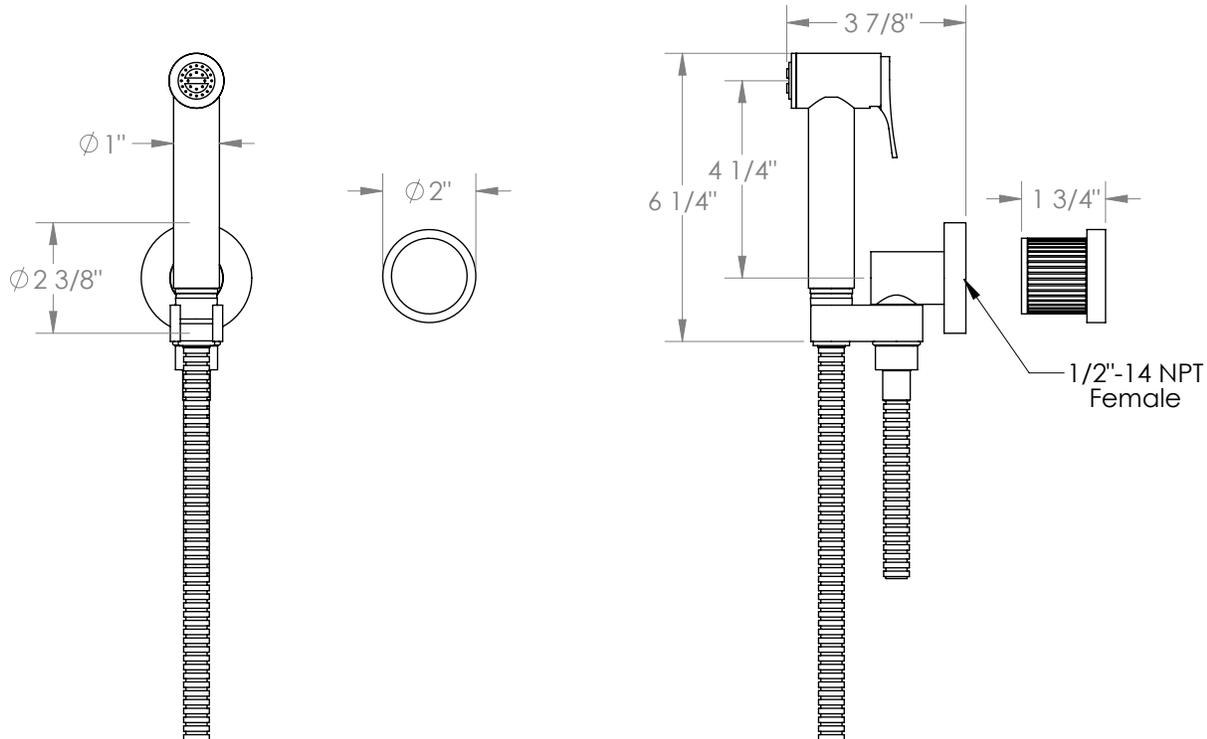

Meets the applicable requirements of ASME A112.18.1/CSA B125.1, entitled "Plumbing Supply Fittings".

Watermark Designs reserves the right to make revisions without notice to product specifications. All product dimensions are nominal.

Updated: 07/2025

350 Dewitt Ave. Brooklyn, NY 11207 USA | T: 1 718 257 2800 | F: 1 718 257 2144 | [customerservice@watermark-designs.com](mailto:customerservice@watermark-designs.com)